GRHZ600U

DDR3-1333, PC3-10600, Unbuffered, ECC, 1.5V, 240-pin DIMMs

Products in Family

GRHZ600U/1GB (1 x 1GB 1Rx8 DIMMs)
GRHZ600U/2GB (1 x 2GB 2Rx8 DIMMs)
GRHZ600U/4GB (1 x 4GB 2Rx8 DIMMs)

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V ±0.075 Fully RoHS Compliant	Each GRHZ600U upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	HP Product	Supported in these HP systems:
GRHZ600U/1GB GRHZ600U/2GB GRHZ600U/4GB	FX698AA FX699AA NL797AA	HP Z200, Z400, Z600, Z800 Workstations Note: the 4GB DIMM is not supported in the Z800

Front view

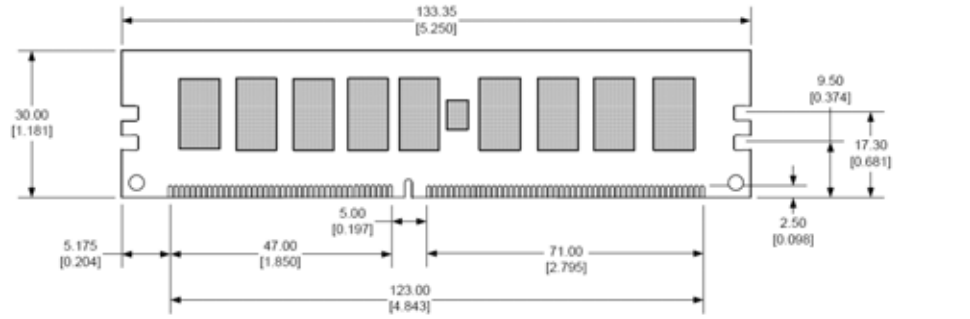

Back view

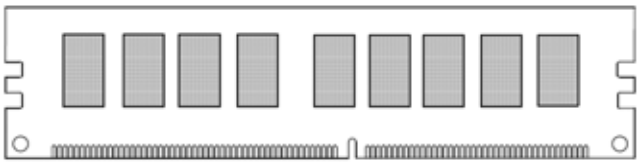

Side view



Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Copyright © 2010 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.